



Product Details

FLEXIBLE SOLAR PANEL



SG-TF-M2-220W

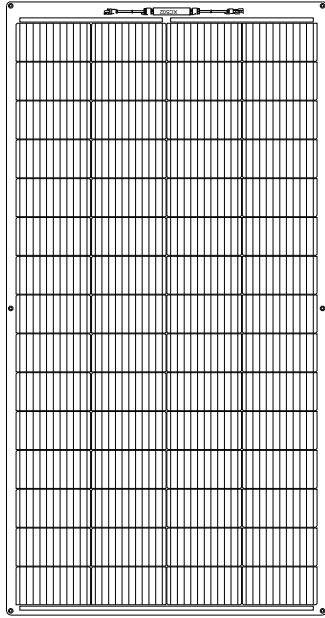

Module Diagram

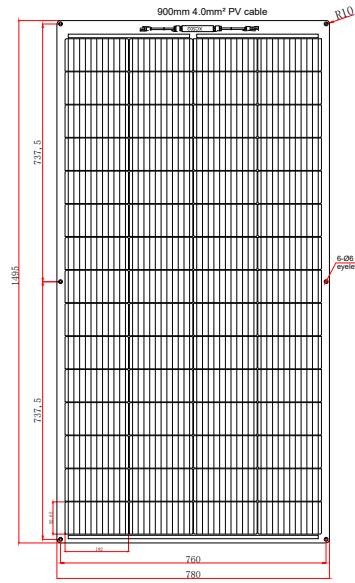

Solar panel bending diagram



~ : Solar panel

Electrical Characteristics


Maximum power(Pmax)	220W
Open-circuit voltage(Voc)	20.4V
Voltage at Pmax(Vmp)	17.4V
Short-circuit current(Isc)	13.28A
Current at Pmax(Imp)	12.65A
Cells Efficiency(%)	22.7%
The maximum system voltage	600V DC(IEC)
Power temperature coefficient	-0.35%/°C
Voltage temperature coefficient	-0.275%/C
Current temperature coefficient	0.045%/C
Output power tolerance	±3%
Operating Temperature	-40°C+85°C

Specifications

Solar cell brand	A grade mono solar cells 182mm
No.of cells and connections	60(4*15)
Module dimension	1495*780*3mm
Weight	3.95KG
Output cable	JB (2*bypass diodes) + 900mm/4mm² cable+MC4 compatible
Waterproof	IP68
Certifications	CE, ROHS
Maximum bending arch height	270mm
Warranty	6-year warranty, 20-year service life

Product Introduction

Sungold TF series photovoltaic panel is an innovative glass-free solar panel. It adopts proven crystalline silicon solar cell. Its technology and polymer composite material truly realize glass-free, lightweight, and thin new flexible solar panels, also TF series is as light as 3.5 kg/m2, which is only 30% of rigid solar panels.

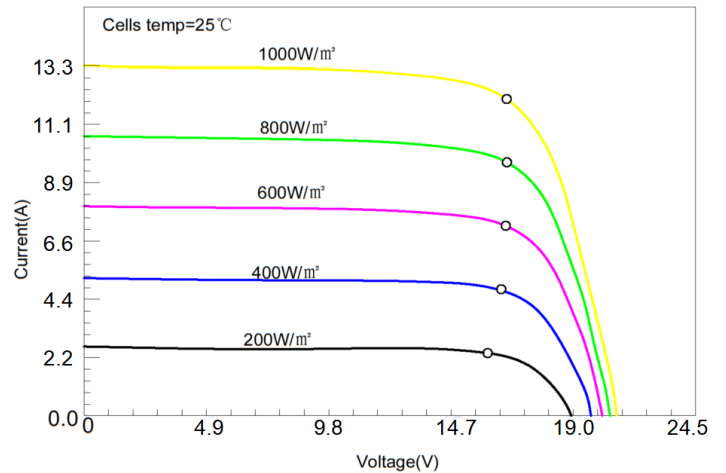

*SUNGOLD offer customize service, please refer to our website or ask SUNGOLD workers for more sizes and the latest parameters.