

DHN-60R18/FS(BW)


500~520W

Full Screen PV Module

No Dust and Dirt on the Surface Increases Power Generation

Quality Guarantee

25-year Material & technology warranty
30-year Linear power output warranty

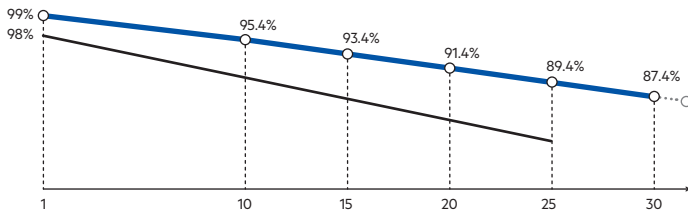

▲ DAH Solar linear power output guarantee
▾ Standard linear power output guarantee

Comprehensive Products & System Certificates



IEC 61215 / IEC 61730 / CE / INMETRO
ISO 45001: 2018/International standards for occupational health & safety
ISO 14001: 2015/Standards for environmental management system
ISO 9001: 2015/Quality management system



Global Patented Full Screen Technology, no dust or snow accumulation, increase power generation by 6-15%



Rectangular cells (182mm x 191.6mm) with higher power



Maximize container utilization, increase loading capacity by 5.4%, and lower transportation costs




High power rectangular solar cells, saving bracket and cable costs, and lower BOS costs



TOPCon cells, lower attenuation, better temperature coefficient & dim light performance

DHN-60R18/FS(BW)

500~520W




Mechanical Specification

Cable	4.0mm ² , 300/200mm in length,
(Including Connector)	Length can be customized
No.of Cells	120 (6×20)
Glass	3.2mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible
Weight	21.7kg
Cells Type	N-type 182×95.8mm
Dimension (L×W×T)	1994×1134×32mm
Packing	34pcs/pallet, 748pcs/40HQ

Operating Parameters

Maximum System Voltage	1000V/1500V DC
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	25A
Snow Load, Frontside/Wind Load, Backside	5400Pa/2400Pa
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

Design

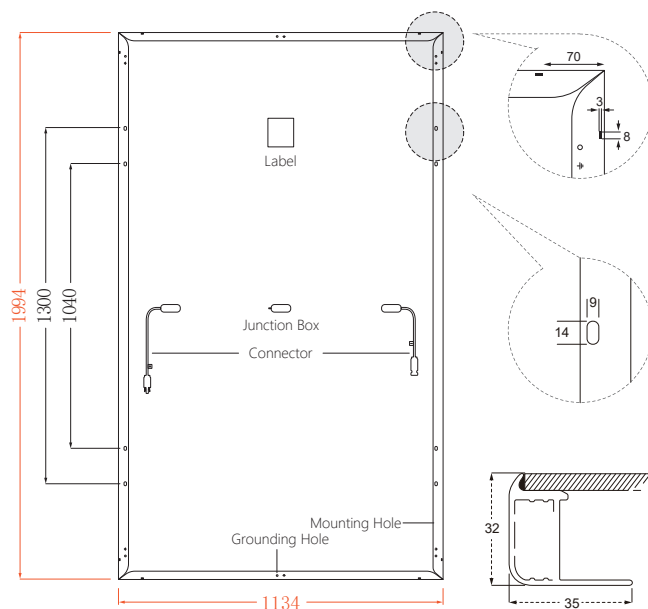

STC—Electrical Characteristics

Module Type	DHN-60R18/FS(BW)				
Maximum Power (P _{max} /W)	500	505	510	515	520
Open-circuit Voltage (V _{oc} /V)	43.7	43.9	44.1	44.3	44.5
Maximum Power Voltage (V _{mp} /V)	37.1	37.3	37.5	37.7	37.9
Short-circuit Current (I _{sc} /A)	14.48	14.54	14.60	14.66	14.72
Maximum Power Current (I _{mp} /A)	13.48	13.54	13.60	13.66	13.72
Module Efficiency (%)	22.11	22.33	22.55	22.78	23.00

Power Tolerance: 0~+5W, Temperature Coefficient of I_{sc}: 0.046%/°C, Temperature Coefficient of V_{oc}: -0.25%/°C, Temperature Coefficient of P_{max}: -0.29%/°C

Standard Test Environment : Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5


NOCT—Electrical Characteristics

Maximum Power (P _{max} /W)	376	380	384	387	391
Open-circuit Voltage (V _{oc} /V)	41.5	41.7	41.9	42.1	42.3
Maximum Power Voltage (V _{mp} /V)	35.2	35.4	35.6	35.8	36.0
Short-circuit Current (I _{sc} /A)	11.69	11.74	11.79	11.84	11.88
Maximum Power Current (I _{mp} /A)	10.67	10.72	10.77	10.81	10.86


Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

I-V Curve

Current-Voltage Curve

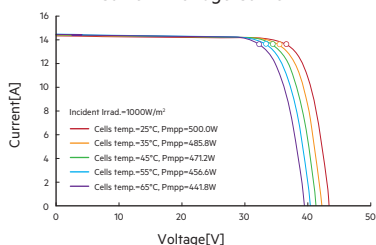

Power-Voltage Curve

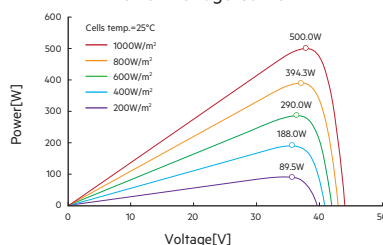

Current-Voltage Curve

